

PARAMETERS	in_liner 2.1
Diameter range	DN150-2000
Thickness	≤ 20 mm, in 1 mm *thicker liners available for order
Maximum liner length	300 m
Resin	UP/VE
Carrier	ECR glass fibre
Installation method	pulling
Method of curing	UV
Short term modulus of elasticity	≥ 21 500 N/mm ²
National Technical Assessment	ITB-KOT-2019/0749

Exhibits resistance to internal pressure and chemical agents


The production capacity of our plant is 300 km of liners per year. Our products have been installed in many cities in Poland and Europe, including Bydgoszcz, Gliwice, Katowice, Rzeszów, Suwałki, Świecie, Włocławek, Zielona Góra, as well as Tallinn and Klaipėda.

You can place a standard order (14 days) or express.

The in_liner plant is Poland's largest factory of liners for trenchless sewer renovation. We focus on quality - we operate following ISO 9001, and on ecology - innovative technologies help us reduce CO₂ emissions.

We manufacture ECR fibreglass liners in diameters ranging from DN150 to DN2000.

- Reinforced outer foil for UV protection
- Outer coating
- Resin-glass composite
- Wear layer
- Inner foil

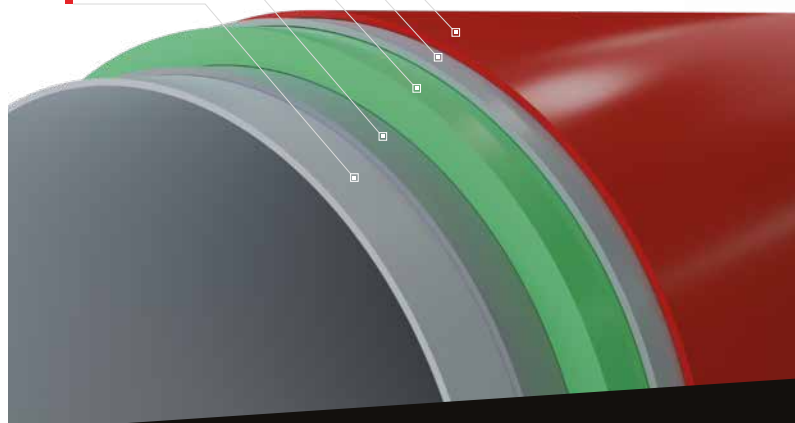

We attend to the needs of our Customer at every stage of completion of an order
CHECK OUT OUR OFFER!

CONTACT

Production Plant in_liner
Gdów 1465, 32-420 Gdów
Poland

biuro@in-liner.pl
+48 573 901 661

